

Analysis and Design of Multistory Building with Grid Slab Using ETABS

Chintha Santhosh¹, Venkatesh Wadki², S.Madan Mohan³, S.Sreenatha Reddy⁴

P.G Student, Department of Civil Engineering, Guru Nanak Institute of Technology, Rangareddy, Telangana, India¹

Assistant Professor, Department of Civil Engineering, Guru Nanak Institute of Technology, Rangareddy, Telangana,
India²

Professor, Department of Civil Engineering, Guru Nanak Institute of Technology, Rangareddy, Telangana, India³

Principal, Department of Civil Engineering, Guru Nanak Institute of Technology, Rangareddy, Telangana, India⁴

ABSTRACT: Grid floor systems consisting of beams spaced at regular intervals in perpendicular directions, monolithic with slab. They are generally employed for architectural reasons for large rooms such as auditoriums, vestibules, theatre halls, show rooms of shops where column free space is often the main requirement. The rectangular or square void formed in the ceiling is advantageously utilized for concealed architectural lighting. The sizes of the beams running in perpendicular directions are generally kept the same. Instead of rectangular beam grid, a diagonal. In the present problem G+5 Building is consider and analysis and design is done for both Gravity and lateral (earth quake and wind) loads. And this is compared with the flat slab.

KEYWORDS: Grid floor, ETABS, wind and earth quake.

I.INTRODUCTION

A building is a man-made structure with a roof and walls standing more or less permanently in one place. Buildings come in a variety of shapes, sizes and functions, and have been adapted throughout history for a wide number of factors, from building materials available, to weather conditions, to land prices, ground conditions, specific uses and aesthetic reasons. To better understand the term building compares the list of nonbinding structures. Buildings serve several needs of society – primarily as shelter from weather, security, living space, privacy, to store belongings, and to comfortably live and work. A building as a shelter represents a physical division of the human habitat (a place of comfort and safety) and the outside (a place that at times may be harsh and harmful).

GRID SLAB

Grid floor systems consisting of beams spaced at regular interval in perpendicular directions, monolithic with slab. They are generally employed for architectural reasons for large rooms such as auditoriums, theatre halls, show rooms of shop where column free spaced void formed in the ceiling is advantageously utilized for concealed architectural lighting. The sizes of the beam running in perpendicular directions are generally kept the same. Instead of rectangular beam grid, adiaagonal.

International Journal of Innovative Research in Science, Engineering and Technology

(An ISO 3297: 2007 Certified Organization)

Vol. 5, Issue 9, September 2016



II. LITERATURE SURVEY

Torben Valdbjorn Rasmussen (2013) has worked on Novel Radon Sub-Slab Suctioning System. A new principle for radon protection is currently presented which makes use of a system of horizontal pressurized Air ducts located within the lower part of the rigid insulation layer of the ground-floor slab. The function of this system is based on the principles of pressure reduction within the zone below the ground-floor construction. For this purpose a new system of prefabricated lightweight elements is introduced. The Effectiveness of the system is demonstrated for the case of a ground-floor reinforced concrete slab situated on top of a rigid insulation layer (consisting of a thermal insulation layer located on top of a capillary-breaking layer) mounted intern on stable ground.

Sandesh (2012) has worked on Dynamic Analysis of Special Moment Resisting Frame Building with Flat Slab and Grid Slab. A popular form of concrete building construction uses a flat concrete slab (without beams) as the floor system. This system is very simple to construct, and is efficient in that it requires the minimum building height for a given number of stories. Unfortunately, earthquake experience has proved that this form of construction is vulnerable to failure, when not designed and detailed properly, in which the thin concrete slab fractures around the supporting columns and drops downward, leading potentially to a complete progressive collapse of a building as one floor cascades down onto the floors below

III. MODELING OF R.C MOMENT RESISTING FRAME


In this present study ground +5 storey r.c.c building is considered 12m x 12m panel. The construction Technology is R.C moment resisting frame and Grid slabs. The modeling is done in ETABS. The structure is divided into frame and shell elements. Grid lines are made for the x, y and z coordinates and the wall is drawn from scratch. Boundary conditions are assigned to the nodes wherever it is required. Boundary conditions are assigned at the bottom of the wall i.e., at ground level where restraints should be against all movements to imitate the behavior of structure. The material properties are defined such as mass, weight, modulus of elasticity, Poisson's ratio, strength characteristics etc.

Material name	Concrete
Type of material	Isotropic
Mass per unit volume	25 kN/m ³
Modulus of elasticity	32 kN/m ²
Poissonratio's ratio	0.2
Concrete strength	20 MPA

International Journal of Innovative Research in Science, Engineering and Technology

(An ISO 3297: 2007 Certified Organization)

Vol. 5, Issue 9, September 2016

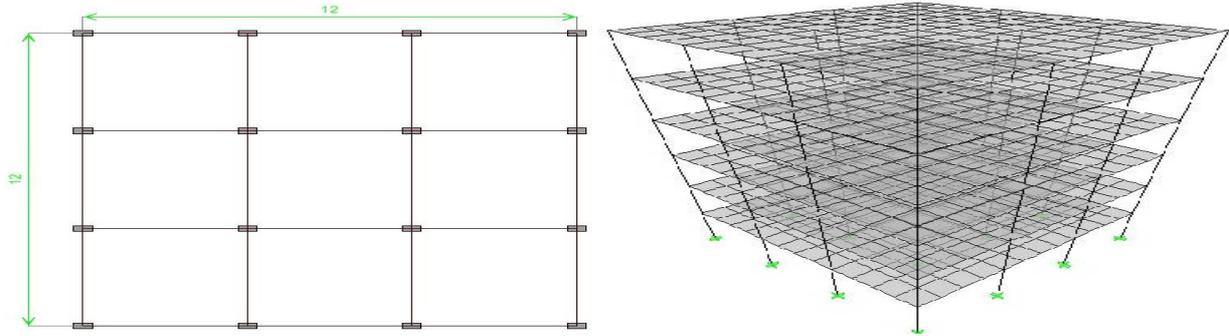


GEOMETRIC DATA

S.NO.	I T E M	D I M E N S I O N
1	Plane dimensions	1 2 × 1 2 m
2	Length in X-direction	1 2 m
3	Length in Y-direction	1 2 m
4	Floor to floor height	3 . 0 m
5	No. Of storiesstories height	G + 5
6	Total Height of the building	1 8 m
7	Thickness of slab	2 0 0 m m
8	B e a m	2 3 0 × 3 8 0 m m
9	Size of coloumn	2 3 0 × 4 5 0 m m
10	Grade of concrete	M 2 0
1 1	Grade of steel	F e 4 1 5
1 2	Panel dimension	4 m × 4 m

International Journal of Innovative Research in Science, Engineering and Technology

(An ISO 3297: 2007 Certified Organization)

Vol. 5, Issue 9, September 2016

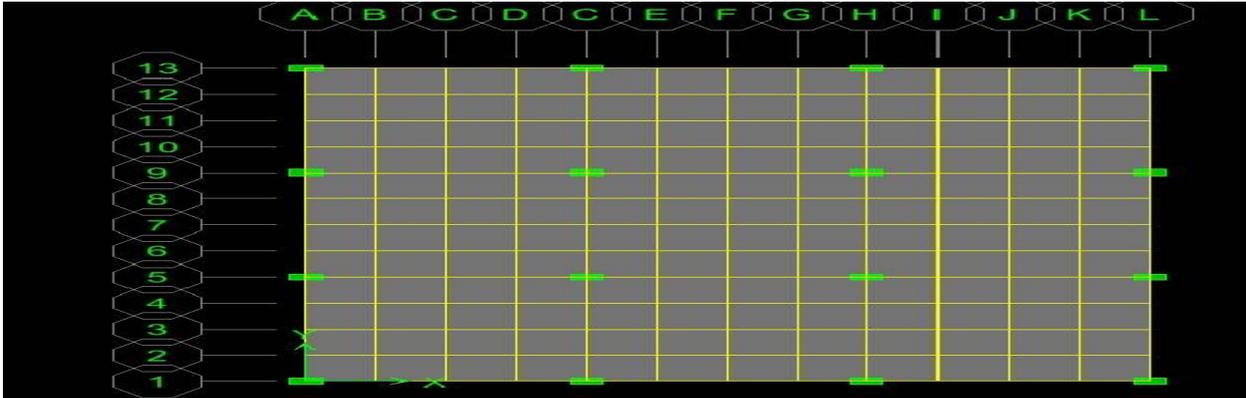

GRID SLAB WITH FINITE MESHING

In this present work consider both gravity and lateral load cases. The load combinations as per the Indian standards are considered. The primary load cases and the load combinations are shown in table.

S e i s m i c c o e f f i c i e n t s		W i n d c o e f f i c i e n t s	
AS PER IS: 1893-2001		AS PER IS: 875-1987	
Seismic Zone Factor	0 . 1 6	Wind speed (V_b)	44m/s
S o i l t y p e	I I I	Terrain Category	I I
Importance Factor (I)	1	Structure Class	B
Response Reduction (R)	3	Risk Coefficient k_1 factor	1
		Topography k_3 factor	1
		Windward coefficient	0 . 8
		Leeward coefficient	0 . 5

IV. SUPPORT REACTIONS

Structural systems transfer their loading through a series of elements to the ground. This is accomplished by designing the joining of the elements at their intersections. Each connection is designed so that it can transfer, or support, a specific type of load or loading condition. In order to be able to analyze a structure, it is first necessary to be clear about the forces that can be resisted, and transferred, at each level of support throughout the structure.

International Journal of Innovative Research in Science, Engineering and Technology

(An ISO 3297: 2007 Certified Organization)

Vol. 5, Issue 9, September 2016

Column Number	Reaction (kN)	M o m e n t s (K N - m)			
		M	X	Y	Z
1	1 0 0 6 . 6 7	8 0 . 8 5	1 9 . 8 0 7	0 . 6 7 4	
2	1 0 7 2 . 0 3	8 4 . 6 7 8	7 . 8 8 2	0 . 6 7 4	
3	1 0 5 8 . 3	7 3 . 7 0 3	0 . 1 0 2	0 . 6 7 4	
4	9 0 8 . 8 2	6 9 . 8 7 4	1 0 . 2 1 6	0 . 6 7 4	
5	2 0 3 3 . 4 5	8 4 . 7 3 0	3 . 8 8 5	0 . 6 7 4	
6	2 0 6 6 . 4 5	8 5 . 8 7 3	0 . 0 6	0 . 6 7 4	
7	1 4 5 2 . 0 9	8 3 . 9 2 3	1 3 . 1 1 7	0 . 6 7 4	
8	2 0 3 3 . 4 5	8 3 . 4 1 4	1 2 . 9 4	0 . 6 7 4	
9	1 3 6 3 . 2 2	8 6 . 1 8 1	5 . 0 8 1	0 . 6 7 4	
1 0	1 3 6 3 . 0 8	8 3 . 4 2 4	1 2 . 5 9 3	0 . 6 7 4	
1 1	1 3 6 3 . 2 2	8 4 . 7 5 7	1 3 . 5 3 3	0 . 6 7 4	
1 2	2 0 3 3 . 4 5	8 4 . 3 7 4	0 . 7 3 1	0 . 6 7 4	
1 3	1 3 6 3 . 2 2	6 2 . 4 9 8	0 . 0 7 6	0 . 6 7 4	
1 4	1 3 6 3 . 2 2	7 3 . 8 3 1	0 . 3 3 1	0 . 6 7 4	
1 5	1 5 0 1 . 2 7	8 8 . 6 1 8	0 . 3 8 7	0 . 6 7 4	
1 6	1 5 1 7 . 7 0	8 7 . 4 4 6	3 . 0 7 9	0 . 6 7 4	

V.FRAME FORCES

In mechanics, compression is the application of balanced inward ("pushing") forces to different points on a material or structure, that is, forces with no net sum or torque directed so as to reduce its size in one or more directions. It is contrasted with tension or traction, the application of balanced outward ("pulling") forces; and with shearing forces, directed so as to displace layers of the material parallel to each other. The compressive strength of materials and structures is an important engineering consideration.

International Journal of Innovative Research in Science, Engineering and Technology

(An ISO 3297: 2007 Certified Organization)

Vol. 5, Issue 9, September 2016

STOREY	LOCATION	P	T	M	X
5 t h	T O P	2724.66	2895.876	16347.89	
	B O T T O M	2910.96		17465.86	
4 t h	T O P	6748.47	4920.781	40492.44	
	B O T T O M	6935.04		41610.41	
3 r d	T O P	10772.88	6216.785	64636.96	
	B O T T O M	10959.22		65457.67	
2 n d	T O P	14796.9	6945.735	88781.45	
	B O T T O M	17983.8		89899.20	
1 s t	T O P	18820.9	7269.726	112925.45	
	B O T T O M	19007.28		114043.67	
GROUND	T O P	22845.06	7350.725	137070.36	
	B O T T O M	23031.36		138188.36	

VI. DIAPHRAGM DRIFT

STOREY	DIRECTIONS	MAX DRIFT
5 t h	X	0.002137
	Y	0.002574
4 t h	X	0.003391
	Y	0.004260
3 r d	X	0.004258
	Y	0.005360
2 n d	X	0.004717
	Y	0.005965
1 s t	X	0.004703

International Journal of Innovative Research in Science, Engineering and Technology

(An ISO 3297: 2007 Certified Organization)

Vol. 5, Issue 9, September 2016

	Y	0.006610
GROUND	X	0 . 0 0 5 0 8 9
	Y	0.007700

Drift problem as the horizontal displacements of tall buildings is one of the most serious issues in building design, relating to the dynamic characteristics of the building during earthquakes and strong winds. Drift shall be caused by the accumulated deformation of each member, such as a column, beam, brace and shear wall. Therefore, when we went to control the quantity of displacement by changing its design, we cannot figure out which member of the computer calculation.

VII.CONCLUSSIONS

1.In this present work ETABS is used to analysis the R.C moment resting frame structure of G+5 considering the gravity and lateral loads. The following conclusion is drawn from present work.

- I.Maximum time period is 3.53901 for mode -1 in the structure.
 - II. For maximum time period the natural frequency is 0.28256 cycles/sec
 - III. Modal participating mass ratios for mode-10 is x-trans is 97% and Y-trans is 99%
 - IV. Maximum axial force in the structure is 23031.36 Kn
 - V. Maximum tensile force in the frame is 7350.726 kN.
 - VI. Maximum diaphragm drift is 0.007700.
 - VII. Design of R.C.C column a)Size 230 x 450 b)Reinforcement 8no's of 12dia c)0.874 % reinforcement
 - VIII. Design of R.C.C Beam. a)Size 230 x 380 b)0.85 % reinforcement
 - XI. Design of R.C.C slab a)200 mm thickness b)8 dia 230mm spacing
 - X. Design of R.C.C footing a)2.5m x 2.3m
2. Maximum displacement is observed in flat slab with drop compare to grid slab with and without infills in both zones, but deflection is more in zone IV than zone III.
 - 3.Maximum Time period of grid slab is less in compare with flat slab with and without drop with and without infills structures in zone IV. Structures without infills having significantly more time period compare to structure with infills.
 - 4.Grid slab structures possess maximum base shear in comparison with flat slab with and without drop in both zones.
 5. Storey drift values of different types of buildings are within the permissible limit as per IS-1893-2002 code provision i.e. 0.4% of the floor height.

REFERENCES

1. IS: 875-1987. 'Indian Standard Code of Practice for Design Loads (other than Earthquakes) for Buildings and Structures, (2nd revision).' Bureau of Indian Standard, New Delhi
2. IS: 456-2000. 'Indian Standard Code of Practice for Design of reinforced concrete', Bureau of Indian Standard, New Delhi
3. Design of Reinforced concrete structures by S. Ramamrutham and R. Narayanan, 17 th edition Dhanpat Rai Publishing Company.
4. User manual for E tabs.
5. A Sathawane R.S Deotale 'Analysis and design of flat and grid slab and their comparision, international journal of engineering Research and their applications vol 1. Issue.3.PP 837-848.
6. Baishali Das Static and dynamic analysis of grid beams, project report of Bachelor of technology, Department of civil engineering ,National institute of technology Rourkila 21010.

International Journal of Innovative Research in Science, Engineering and Technology

(An ISO 3297: 2007 Certified Organization)

Vol. 5, Issue 9, September 2016

7. N. krishnaraju, Advanced reinforced concrete design (IS 456-2000)(CBS publications and distributors, CBS plaza, New delhi)
8. Ibrahim vepari, Dr.H.S Patrl, study on econamical aspects of long span slabs, 13-14 may 2000.
9. Charles, E. Reynolds and James C. Steedman Reinforced concrete design handbook (E&FM span Taylor and Francis cgroup 1988).

BIOGRAPHY



C.SANTHOSH KUMAR was born in 1993 at narayanpet village in mahabub nagar district, telangana. He received his bachelor of technology in civil engineering from sree visvesvaraya institute of engineering and science in 2014. He is currently a final year student of master of technology in structural engineering from gurunanak institute of technology. His research covers analysis of buildings by using Etabs



Assistant prof. Venkatesh Wadki was born in 1991 in koppl. He is currently Assistant Professor Department of civil engineering, Guru Nanak Institute of Technology IBP, HYD. He completed his B.E in civil engg from PDACE gulbarga and M.Tech in Structural engg from BEC bagalkot, Karnataka. His area of interest includes design and analysis of buildings using latest softwares, FRP reinforced concrete and earthquake resistant structures. He is having more than one year experience in academics. Presently he is guiding two B.Tech and M.Tech projects.



Prof. S.Madan mohan received his bachelor of technology degree in civil engineering from JNTUCE Hyderabad in 1988. In 2001 he received his Master's degree in structural engineering from University college of engineering Osmania university. He joined Gurunanak institute of technology as a faculty where he is a Professor and head of department of civil engineering with an experience of 17 years in field of research, designing and education.